


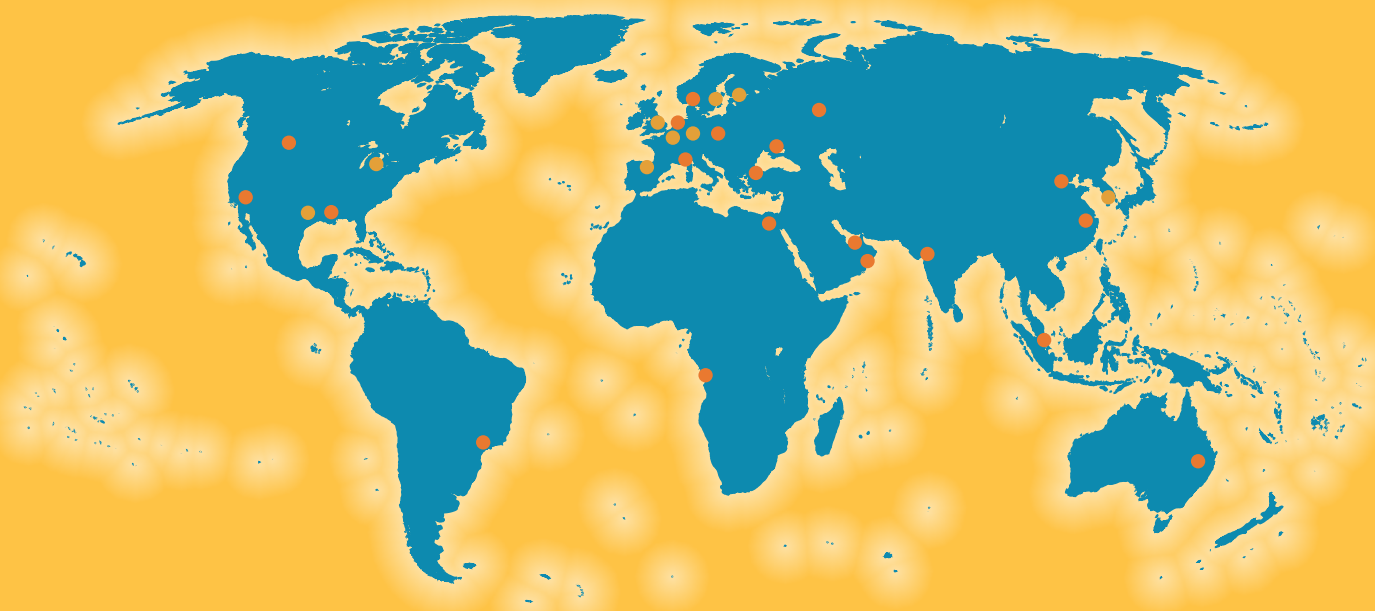

Sweden

Lamiflex AB
Gasverksvägen 4-6
611 35 Nyköping
Phone: +46 (0)155-280260
Fax: +46 (0)155-280270
headoffice@lamiflex.se
order@lamiflex.se

Germany

Lamiflex GmbH
Kappeler Straße 126
D-40599 Düsseldorf
Phone: +49 (0)211 92300-0
Fax: +49 (0)211 92300-33
info@lamiflex.de

United States

Lamiflex Inc.
1610 Woodstead Ct. Suite 440
The Woodlands TX 77380
Phone: +1-832-251-0200
Fax: +1-832-251-0201
lamiflexus@lamiflex.com

Korea

Lamiflex Korea Ltd. -Busan Office
#1101, Hyundai-officetel, 76-5,
Daeyun3-dong, Nam-ku, Busan, S.Korea
Zip-code: 608-815
Phone : +82 (0)51 623 6351
Fax: +82 (0)51 623 6350
Mobile: +82 (0)10 8824 5115
jung-wook.choi@lamiflex.se


India

Lamiflex Packtech India Private Limited
R.K Plaza, Plot No. 17
Survey No 206/3, Viman Nagar
Pune – 411014, Maharashtra India
Phone: +91 9619 87 52 05
rakesh.pattanaik@lamiflex.com



LAMIFLEX
GROUP

Pushwrapper – A new stretchwrapping concept from the Lamiflex Group

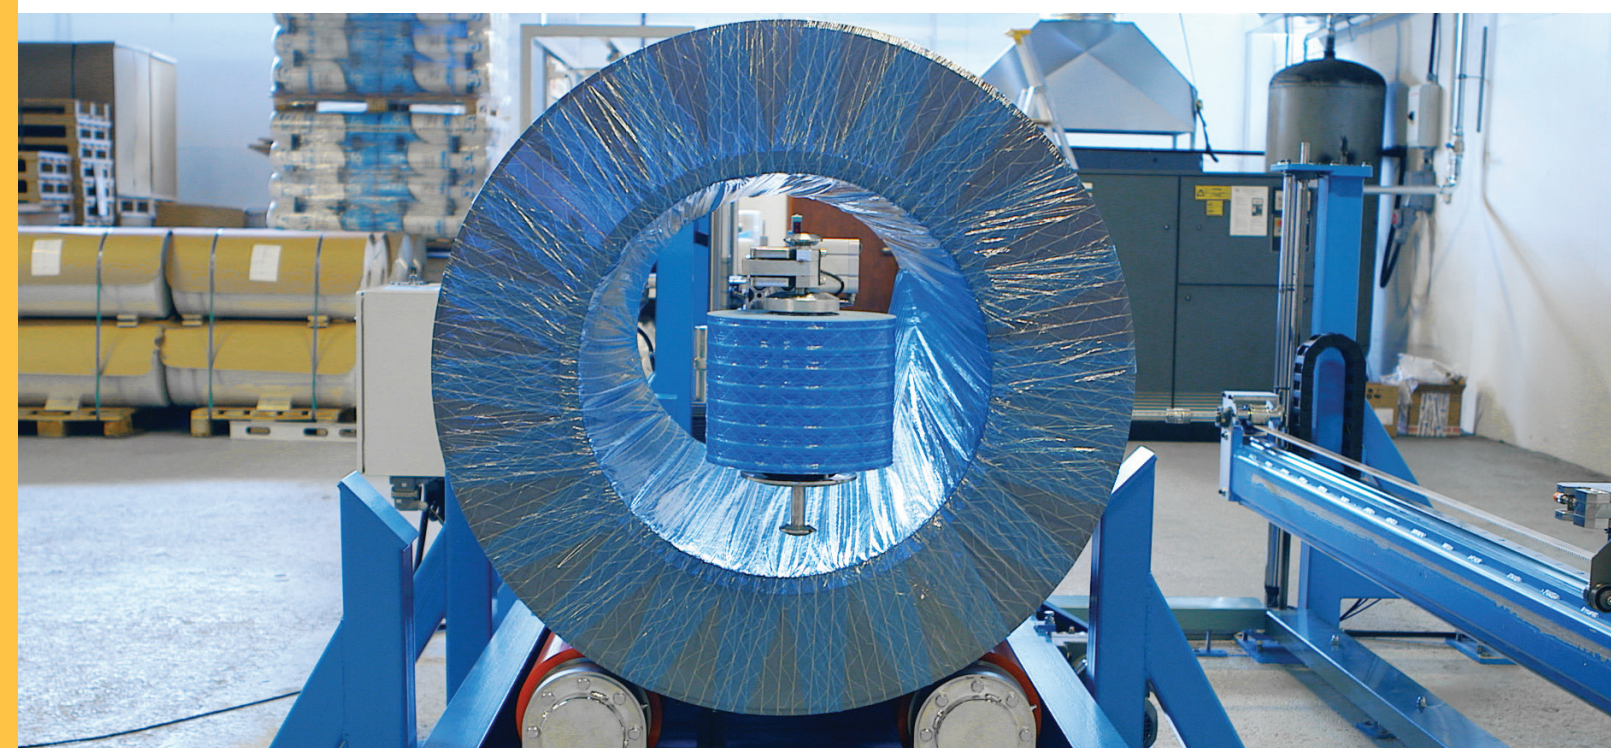

2340_2015/07





Pushwrapper

An easy start for plastic wrapping

The Pushwrapper concept consist of a tailored plastic packaging material coupled with a new simple, but robust machine for wrapping steel or aluminum coils. Easily operated by one person, but can easily be scalable if more capacity is needed.

The Pushwrapper is an entry level, scalable machine that works with a "hand over" technique, using arms that complement our range of more advanced machine solutions. The concept is unique (patent pending) and makes it very easy to start with plastic wrapping material, compared to alternative machines that need large investments, planning projects and infrastructure.

If more capacity is needed, it's simple to supplement with additional machines. Two people can easily run four machines.

A full plastic packaging concept with the Pushwrapper will give a number of advantages for both the producer and end customer,


- reduce risk of corrosion
- improve productivity
- reduce labor cost
- improve safety and ergonomics
- improve corporate image

The Pushwrapper concept is a perfect solution for,

- the service center
- as a back-up machine in a larger plant
- as an entry level installation

Pushwrapper

A simple and robust machine for wrapping

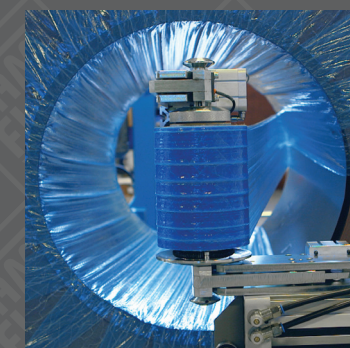

Lamifree – financing solution

By writing a contract for the packaging material (normally 3-year), you will get the Pushwrapper machine at no cost.

Specifications:

- Max OD 1800 mm
- Max width 1800 mm
- Max weight 20 tons
- Min inner diameter 430 mm
- Film roll spec: 250x200 mm
- Wrapping time: Standard size coil approx. 6-7 minutes.
- Compressed air
- Electricity 3 phase 16 A
- Requirements: Compressed air and electricity 3 phase 16 A.
- Coil handling: By overhead crane and/or forklift.

Please contact your local Lamiflex representative for more information.

